


Ansi double block and bleed plug valve

IN PACE WITH THE WORLD TO FORM AN CHINA MODEL

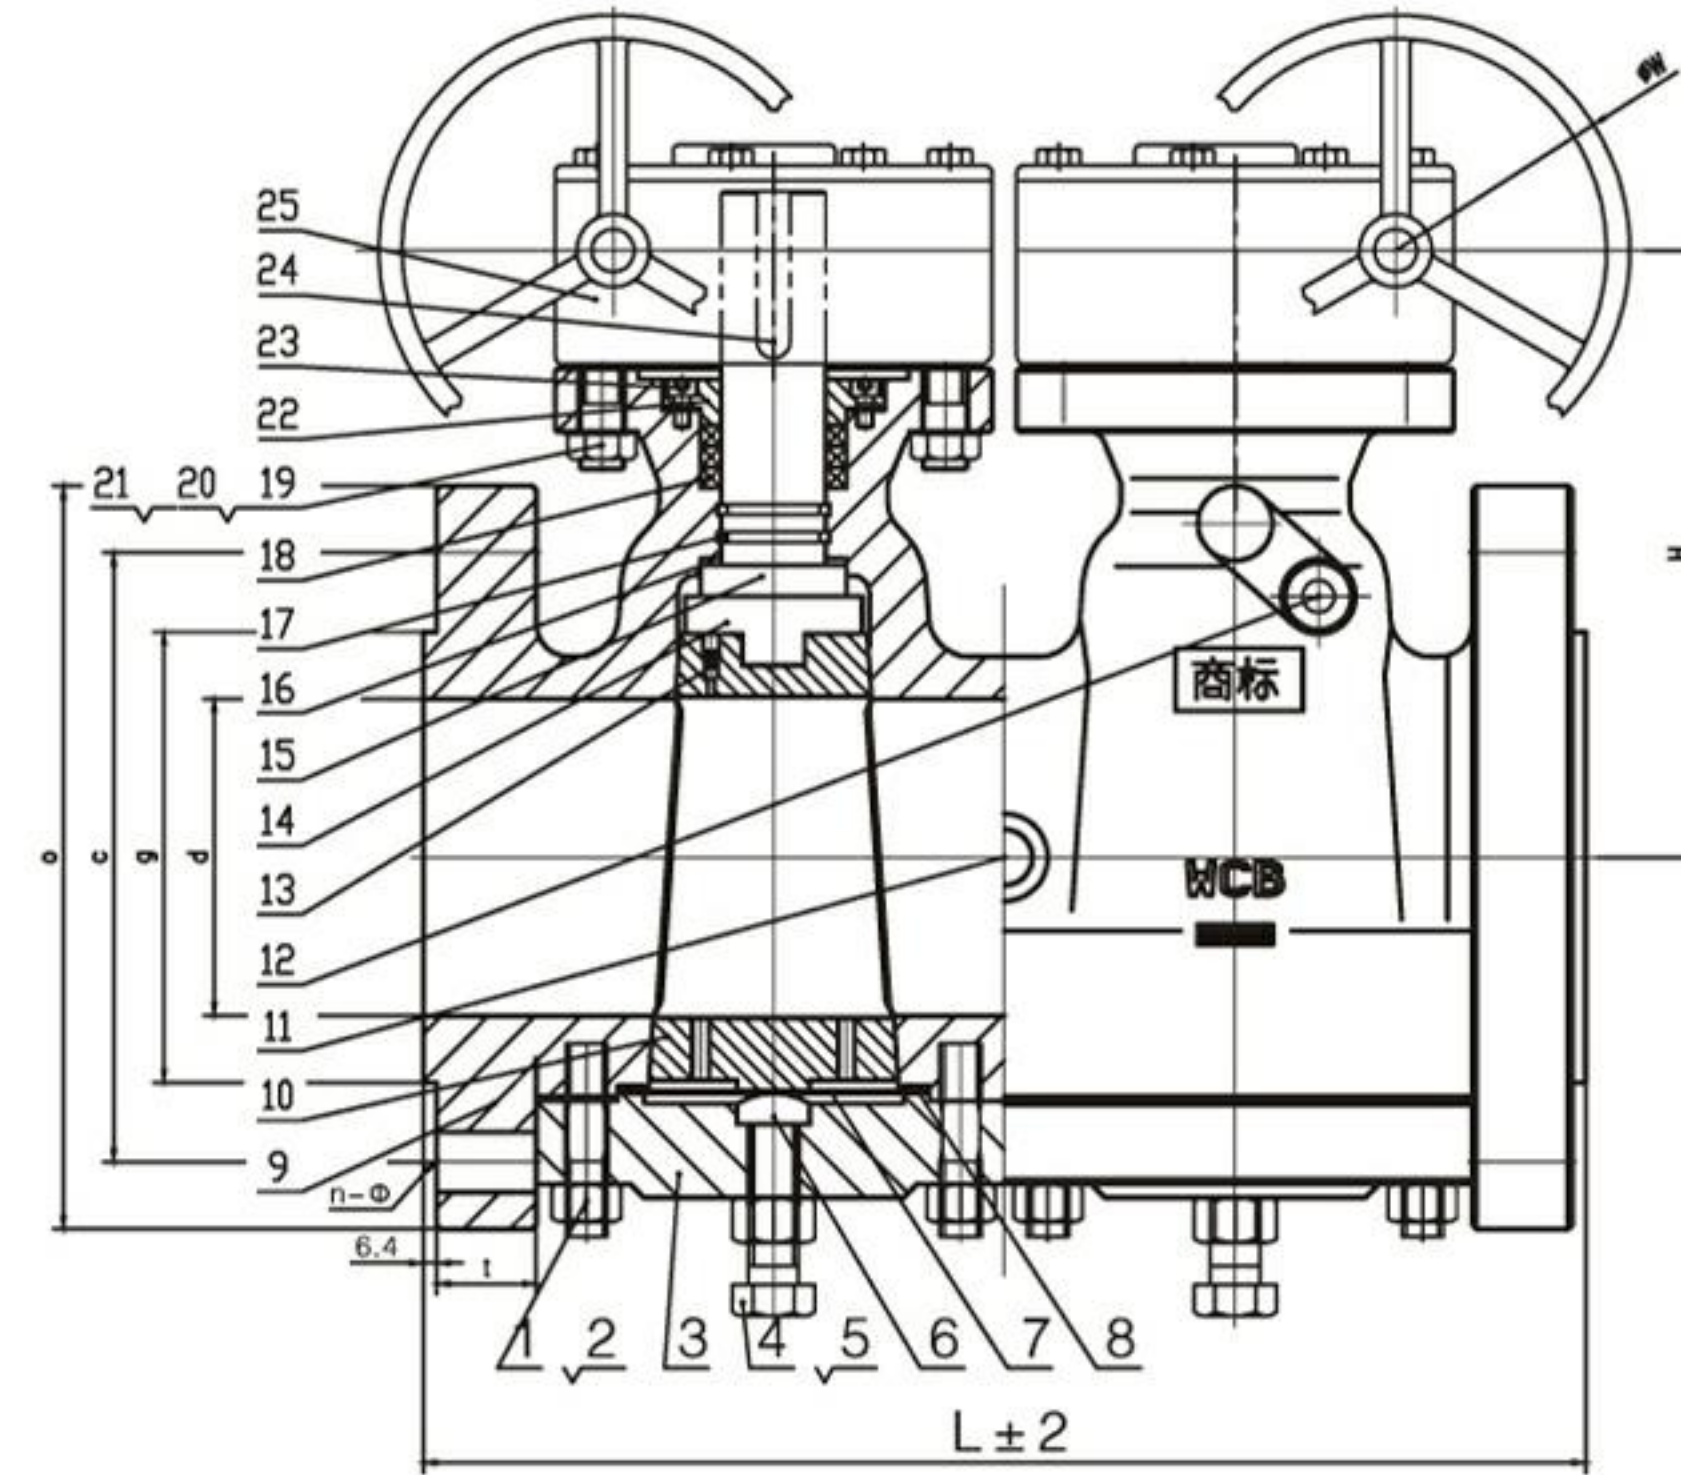

150LB

NPS	d	L	o	c	g	t	n-Φ	H	W
1/2	13		89	60.5	35	12	4-15	180	440
3/4	19		98	70	43	12	4-15	180	440
1	25	229	108	79.5	51	12	4-15	185	440
1 1/4	32	229	117	89	64	13	4-15	200	440
1 1/2	38	241	127	98.5	73	15	4-15	210	600
2	51	267	152	120.5	92	16	4-19	215	600
2 1/2	64	298	178	139.5	105	18	4-19	250	600
3	76	343	190	152.5	127	19	4-19	270	660
4	102	432	229	190.5	157	24	8-19	300	960
NPS	d	L	o	c	g	t	n-Φ	H	W
4	102	432	229	190.5	157	24	8-19	300	300
5	127		254	216	186	24	8-22	340	300
6	152	546	279	241.5	216	26	8-22	365	320
8	203	622	343	298.5	270	29	8-22	400	320
10	254	661	406	362	324	31	12-25	450	350
12	305	762	483	432	381	32	12-25	510	380

600LB

NPS	d	L	o	c	g	t	n-Φ	H	W
1/2	13		95	66.5	35	15	4-16	180	440
3/4	19		118	82.5	43	16	4-19	180	440
1	25	229	124	89	51	18	4-19	185	440
1 1/4	32	229	133	98.5	64	21	4-19	200	440
1 1/2	38	241	156	114.5	73	23	4-22	210	600
2	51	283	165	127	92	26	8-19	215	600
2 1/2	64	330	190	149	100	29	8-22	250	600
3	76	356	210	168	127	32	8-22	270	660
NPS	d	L	o	c	g	t	n-Φ	H	W
4	102	432	273	216	157	38	8-25	300	300
5	127	508	330	266.5	186	45	8-29	340	300
6	152	559	356	292	216	48	12-29	365	320
8	200	660	419	349	270	56	12-32	400	320
10	248	787	508	432	324	64	16-35	450	350
12	298	838	559	489	381	67	20-35	510	380

300LB

NPS	d	L	o	c	g	t	n-Φ	H	W
1/2	13		95	66.5	35	15	4-16	180	440
3/4	19		117	82.5	43	16	4-19	180	440
1	25	229	124	89	51	18	4-19	185	440
1 1/4	32	229	133	98.5	64	19	4-19	200	440
1 1/2	38	241	156	114.5	73	21	8-22	210	600
2	51	283	165	127	92	23	8-19	215	600
2 1/2	64	330	190	149	105	26	8-22	250	600
3	76	387	210	168.5	127	29	8-22	270	660
NPS	d	L	o	c	g	t	n-Φ	H	W
4	102	457	254	200	157	32	8-22	300	300
5	127	508	279	235	186	35	8-22	340	300
6	152	559	318	270	216	37	12-22	365	320
8	203	686	381	330	270	42	12-25	400	320
10	254	826	445	387.5	324	48	16-29	450	350
12	305	864	521	451	381	51	16-32	510	380

900LB

NPS	d	L	o	c	g	t	n-Φ	H	W
1/2	13		121	82.5	35	22.5	4-23	180	440
3/4	17		130	88.9	43	25.5	4-23	180	440
1	22	254	149	101.6	51	29	4-26	185	440
1 1/4	28	279	159	111.1	64	29	4-26	200	440
1 1/2	35	305	178	123.8	73	32	4-29	210	600
2	47	368	216	165.1	92	38.5	8-26	215	600
2 1/2	57		244	190.5	105	41.5	8-29	250	600
3	73	381	241	190.5	127	38.5	8-26	270	660
NPS	d	L	o	c	g	t	n-Φ	H	W
4	98	457	292	234.9	157	44.5	8-32	390	300
5	121	559	349	279.4	186	51.0	8-35	480	300
6	146	610	381	317.5	216	56.0	12-32	590	320
8	190	737	470	393.7	270	63.5	12-39	610	320
10	238	838	545	469.9	324	70.0	16-39	760	350
12	282	965	610	533.4	381	79.5	20-39	890	380